

FIG. 11B(1)




FIG. 11B



FIG.11B(2)

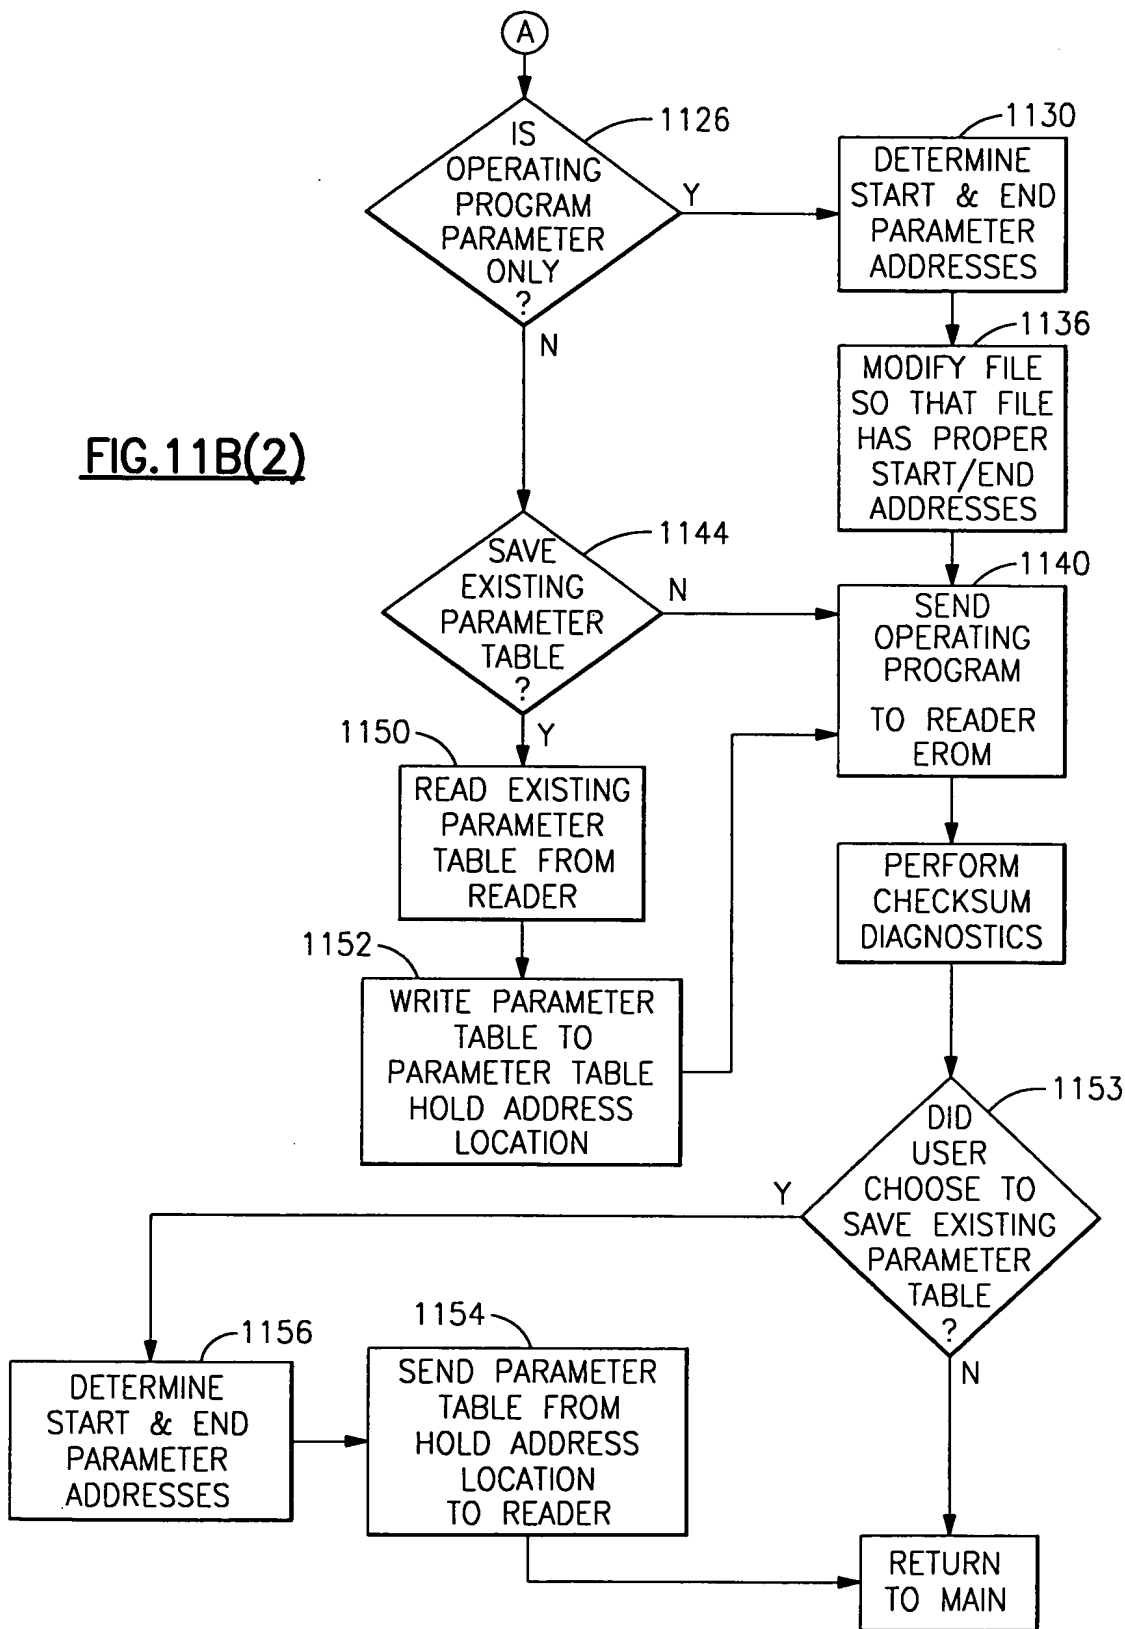


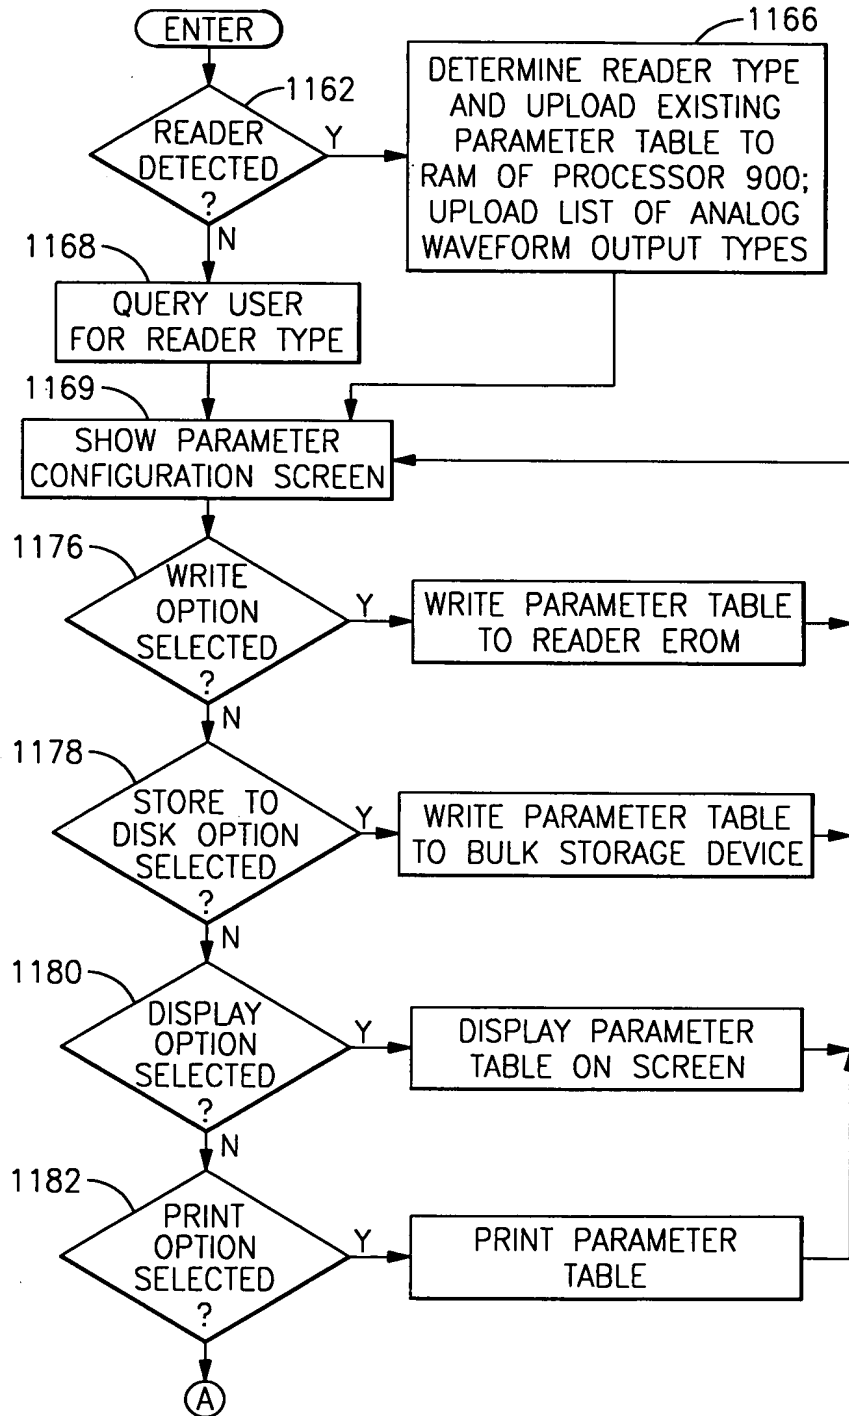


FIG.
11D(1)

FIG.
11D(2)

FIG.11D

FIG.11D(1)



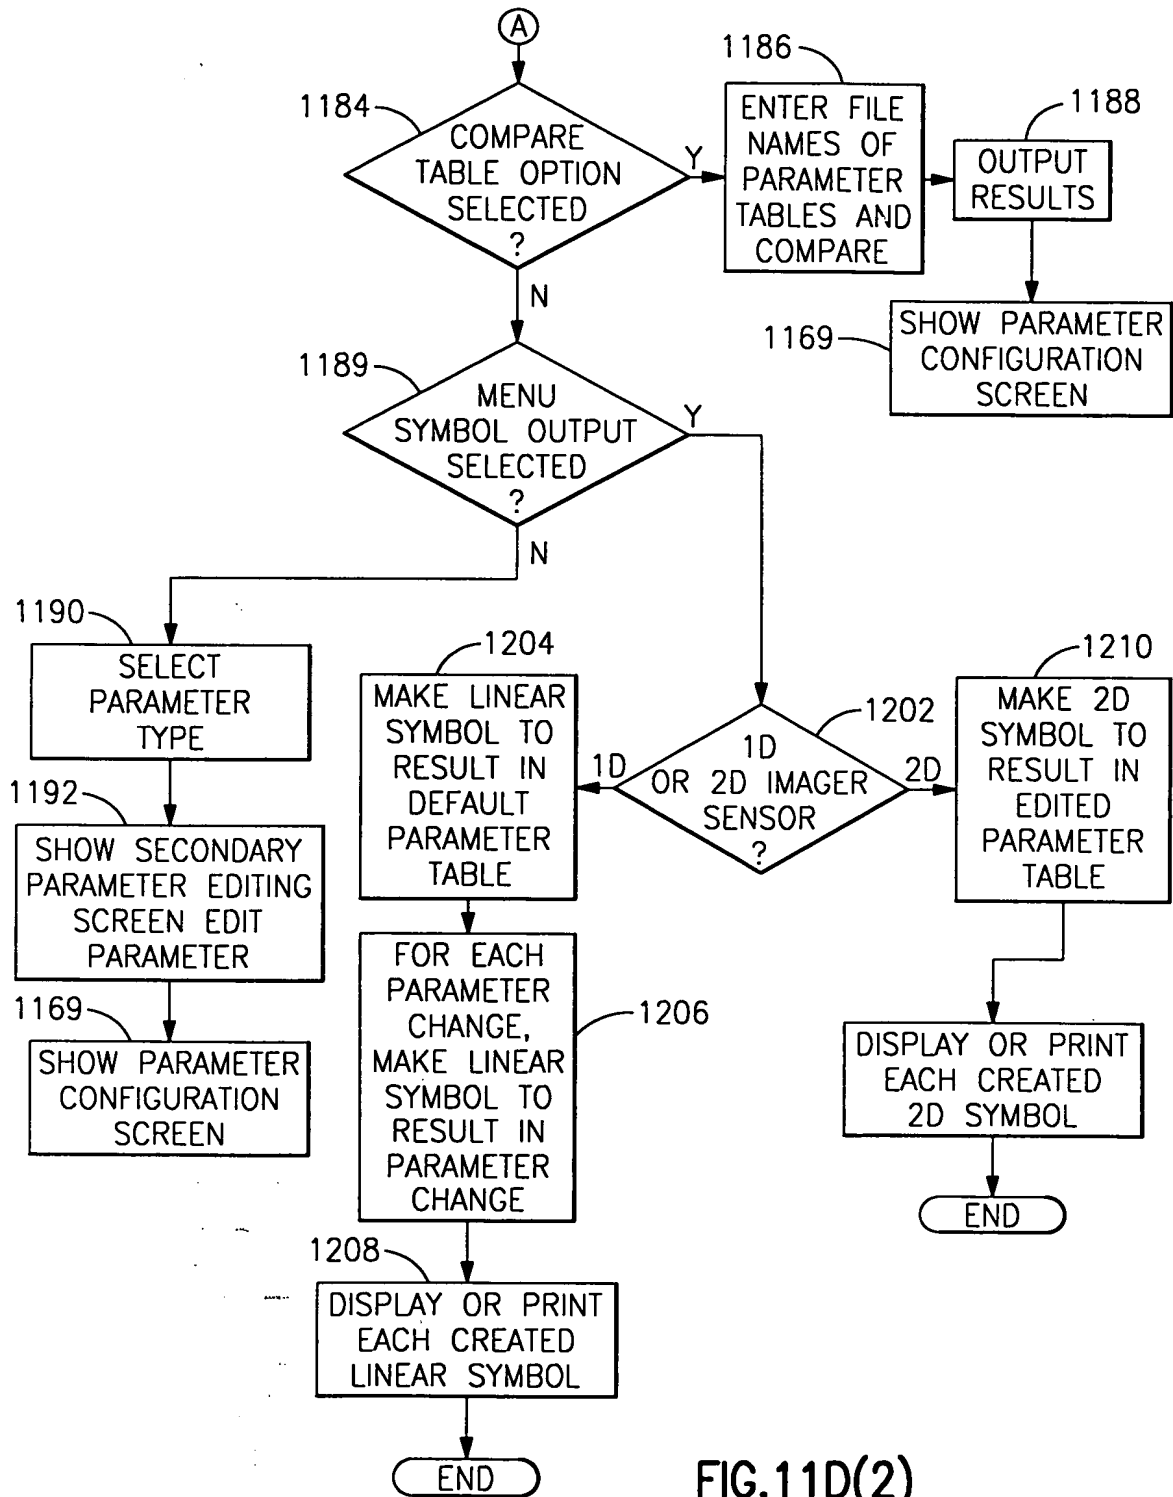



FIG. 11D(2)



DEVICE CONFIGURATION	
PRODUCT: <u>ST3400-x2</u>	FIRMWARE ID: <u>WA23720027</u>
CONFIGURATION:	DESCRIPTION:
<u>P</u> REFIX/ <u>S</u> UFFIX	SETUP CHARACTERS TO TRANSMIT BEFORE AND/OR AFTER EACH BARCODE SYMBOL SCANNED
<u>O</u> UTPUT SETTINGS	SETUP VARIOUS OUTPUT PARAMETERS
<u>S</u> YMBOLGY SETUP	SETUP DECODING CHARACTERISTICS FOR EACH BARCODE SYMBOLGY
<u>T</u> ERMINAL INTERFACE	SELECT THE TERMINAL INTERFACE THE DEVICE WILL CONNECT TO
<u>D</u> ATA <u>F</u> ORMATting	CUSTOMIZE THE FORMAT OF THE OUTPUT OF THE BARCODE MESSAGE
<u>S</u> ERIAL SETTINGS	SETUP THE DEVICE'S SERIAL COMMUNICATION PARAMETERS
<u>M</u> ISC. SETTINGS	SETUP VARIOUS PRIMARY AND SECONDARY INTERFACE OPTIONS
<div>READ FROM DEVICE</div> <div>WRITE TO DEVICE</div> <div>LOAD FROM DISK</div> <div>SAVE TO DISK</div> <div>DEFAULT ALL</div>	
<div>HELP</div> <div>CLOSE</div>	

1174

FIG.11E

